



AZ-V61

Arizon RFID Technology, 100% owned by YFY Group, is a leading company to provide first-class manufacturing services of inlays /tags /tickets and cards for worldwide RFID industry. By 2012 Arizon has produced and delivered more than 1 billion inlays /tags and the number is 10 billion pcs by Apr. of 2019, all products conform to highest quality standards in HF and UHF technology for its valuable customers.

Arizon has established inlay/label monthly capacity up to 300 million pieces by 2018, and will continue its strong investments to further boost its monthly production capacity for satisfying the market's fast growing needs.

### Overview

#### Operating Frequency

860MHz-960MHz

#### Integrated Circuit(IC)

Impinj Monza R6-P

#### Antenna Size

57x18mm

2.244x0.709inch

#### Protocol

EPC Class1 Gen2

ISO/IEC 18000-6C

#### Application Areas

Brand Protection

Industry/Microwave Tag Supply

Chain Management Bento:

≤1500w/5min

Rice Balls: ≤1500w/1min

## Electrical Characteristics

### Antenna

### AZ-V61

Base Material

PET

### IC

### Impinj Monza

### R6

### R6-A

### R6-P

### S6-C

Memory

EPC:

96Bits

96Bits

128(96)Bits

96Bits

User:

0Bits

0Bits

32(64)Bits

32Bits

TID:

48Bits

48Bits

48Bits

48Bits

Unique TID: Access

48Bits

48Bits

32Bits

32Bits

Password:

0Bits

32Bits

32Bits

Kill Password:

0Bits

32Bits

32Bits

IC Life

100,000 Programming cycles

50 years data retention

Operating Mode

Passive

Frequency

860 ~ 960MHz

### Standards

ISO 9001:2008

ISO 14001:2004

OHSAS 18001:2007



Web site: [www.arizonrfid.com](http://www.arizonrfid.com)

Copyright © 2019 Arizon RFID Technology Corporation All rights reserved





## Frequency Sweep

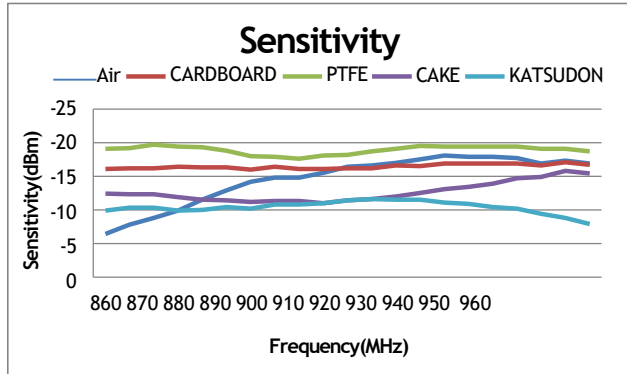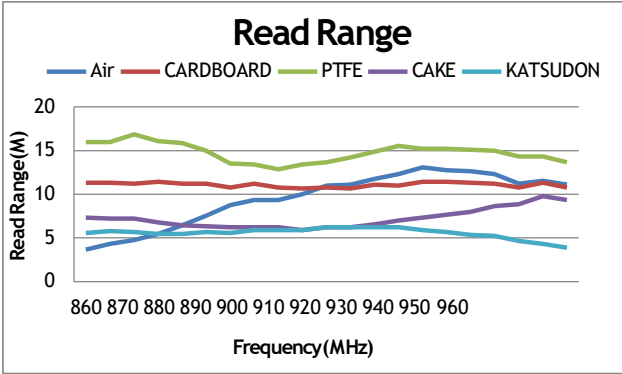


Test power : 4W EIRP

For countries that allow 2W ERP, please reduce the result by 11%

## Radiation Patterns

Angular Sensitivity ( dBm ) ; Power step 0.1dB ; Angle step 10°

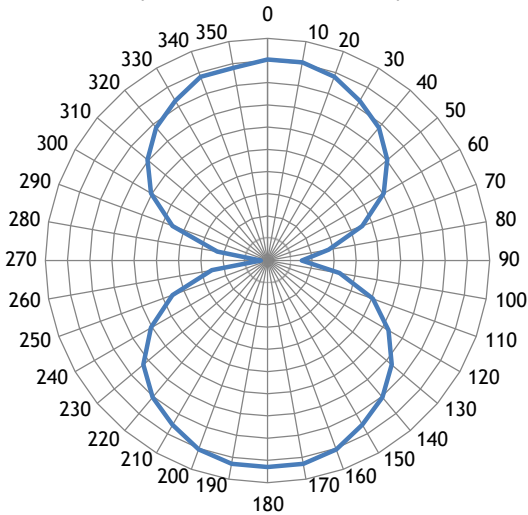

Angular Sensitivity  
)Relative Read Range vs.Orientation(



Angular Sensitivity  
Inlay is rotated in the x,y axis, fixed in z axis  
)Tag shown at 0° with respect to face of antenna(

## Usage Method



CAKE



KATSUDON

Arizon RFID Testing Center:

RFID UHF Band: 800-1000MHz; Shielding effectiveness: > 100 dB; Background noise: < -75 dB Compatible to the following international standard:

EPC Global Class1 Gen2; ISO 18000-6C; GS1 TIPP (Tagged Item Performance Protocol)