

香港商永道無線射頻標籤有限公司台灣分公司 Arizon RFID Technology(Hong Kong)Co.,Ltd.,Taiwan Branch.



Arizon RFID Technology, 100% owned by YFY Group, is a leading company to provide first-class manufacturing services of inlays /tags / tickets and cards for worldwide RFID industry. By 2012 Arizon has produced and delivered more than 1 billion inlays /tags and the number is 10 billion pcs by Apr. of 2019, all products conform to highest quality standards in HF and UHF technology for its valuable customers.

Arizon has established inlay/label monthly capacity up to 300 million pieces by 2018, and will continue its strong investments to further boost its monthly production capacity for satisfying the market's fast growing needs.

Overview

Operating Frequency 860MHz-960MHz

Integrated Circuit(IC)

NXP UCODE7

Antenna Size 50x30mm

1.969x1.181inch

Protocol EPC Class1 Gen2 ISO/IEC 18000-6C

Application Areas Brand Protection Industry/Retail Supply Chain Management

Electrical Characteristics

AZ-G7		
PET		
NXP	UCODE7	UCODE7m
EPC:	128Bits	128Bits
User:	OBits	32Bits
TID:	48Bits	48Bits
Unique TID:	48Bits	48Bits
Access Password:	32Bits	32Bits
Kill Password:	32Bits	32Bits
100,000 Programming cycles		
50 years data retention		
Passive		
860 ~ 960MHz		
ISO 9001:2008		
ISO 14001:2004		
OHSAS 18001:2007		
	PET NXP EPC: User: User: TID: Unique TID: Access Password: Kill Password: 100,000 Programming cycles Kill Password: 50 years data retention Passive 860~960MHz ISO 9001:2008 ISO 14001:2004	PET NXP UCODE7 EPC: 128Bits User: 0Bits User: 0Bits 100: 48Bits


Web site: www.arizonrfid.com Copyright ©2019 Arizon RFID Technology Corporation All rights reserved





香港商永道無線射頻標籤有限公司台灣分公司 Arizon RFID Technology(Hong Kong)Co.,Ltd.,Taiwan Branch.

Frequency Sweep

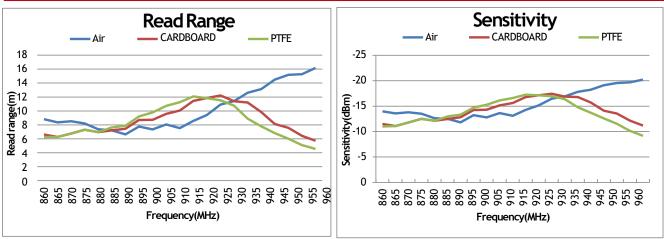


Test power: 4W EIRP

For countries that allow 2W ERP, please reduce the result by 11%

Radiation Patterns

Angular Sensitivity (dBm); Power step 0.1dB; Angle step 10°

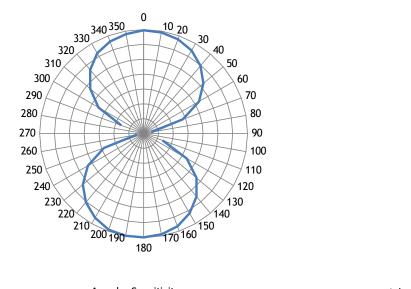

Angular Sensitivity)Relative Read Range vs.Orientation(Antenna



Angular Sensitivity

Inlay is rotated in the x,y axis,fixed in z axis)Tag shown at 0° with respect to face of antenna(

Arizon RFID Testing Center:

RFID UHF Band: 800-1000MHz; Shielding effectiveness: > 100 dB; Background noise: < -75 dB Compatible to the following international standard:

EPC Global Class1 Gen2; ISO 18000-6C; GS1 TIPP (Tagged Item Performance Protocol)